

Effluent Filters

Filters to suit domestic and commercial septic tanks and wastewater treatment systems

Polylok have spent many years designing and perfecting our range of effluent filters to suit all domestic and commercial applications. Filtration ranges from 1500 litres per day to 38,000 litres per day. Innovation is at the heart of product development. This can be seen in our PL-122, PL-525 and PL-625 patented filters that have an integrated shut off ball to stop solids from entering percolation areas when cleaning the cartridge. Filters can also be combined to increase capacity.

To find out more: email sales@polylok.eu, call us today or visit polylok.eu

Polylok Effluent Filters - Domestic or Commercial Applications


See Polylok/Zabel range for more options



for more options see the Polylok/Zabel filters range

Range	Filtration Slot/Daily Flow Rate
A100	1.6mm/ up to 23,940 litres per day
A300	0.8mm/ up to 21,660 litres per day
A600	0.4mm/ up to 16,720 litres per day

Some models are available with shut off ball - Call for more details...

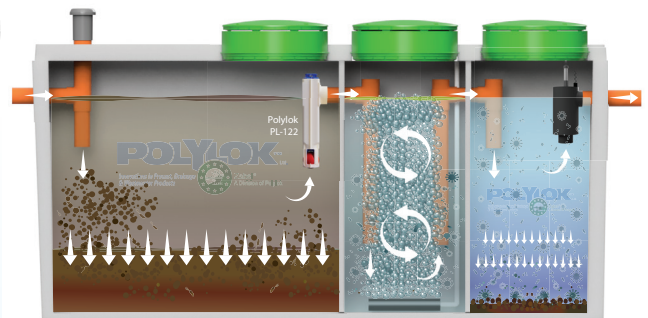

Typical Applications:

1. Residential & Commercial Septic Tanks
2. Residential & Commercial Wastewater Treatment Plants

Main Benefits:

1. Final filtration at outlet of clarifier chamber
2. Easy to install and maintain
3. Cost effective filtration solution
4. Extends life of drainage areas
5. Retains solids in septic tank
6. Installs in multiples for larger flows
7. Shut-off ball also acts as a gas deflector
8. Reduces TSS & CBOD5 (up to 90% and 40% respectively)
9. Alarm and switch available (PL-122, PL-525, PL-625)
10. Made from plastic that will never corrode!

