


EFD Station

The all-in-one Effluent Filter & Distribution Station for wastewater

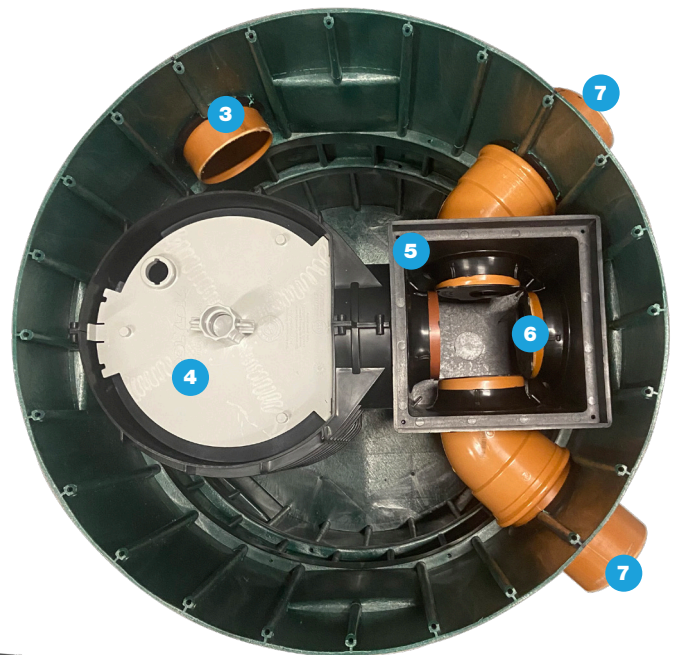

- 1 Lockable Cover
- 2 Modular Station Chamber
- 3 110mm Inlet Pipe
- 4 Effluent Filter with Integrated Shut-off-Ball
- 5 Distribution Chamber
- 6 Rotoflow Outlet Weirs
- 7 110mm Outlet Pipe

Typical Applications:

1. Installation at outlet of a new or existing septic tank
2. Installation at outlet of a new or existing wastewater treatment plant

Main Benefits:

1. One station provides filtration and distribution of effluent
2. Easy to install, just 'Connect & Go'!
3. Prevents solids entering the percolation area or drainage field
4. Available with three filtration sizes (1.6mm, 0.8mm & 0.4mm)
5. Suitable for maximum daily flows up to 8000 litres/day
6. The effluent filter has an integrated shut-off-ball to prevent solids carrying over during cleaning/maintenance.
7. Polylok's effluent filter can decrease suspended solids by up to 90% and CBOD5 by up to 40%
8. Polylok risers can be added to the station to increase the height to finish ground level if required
9. Supplied with Rotoflow outlet flow-control weirs.

